
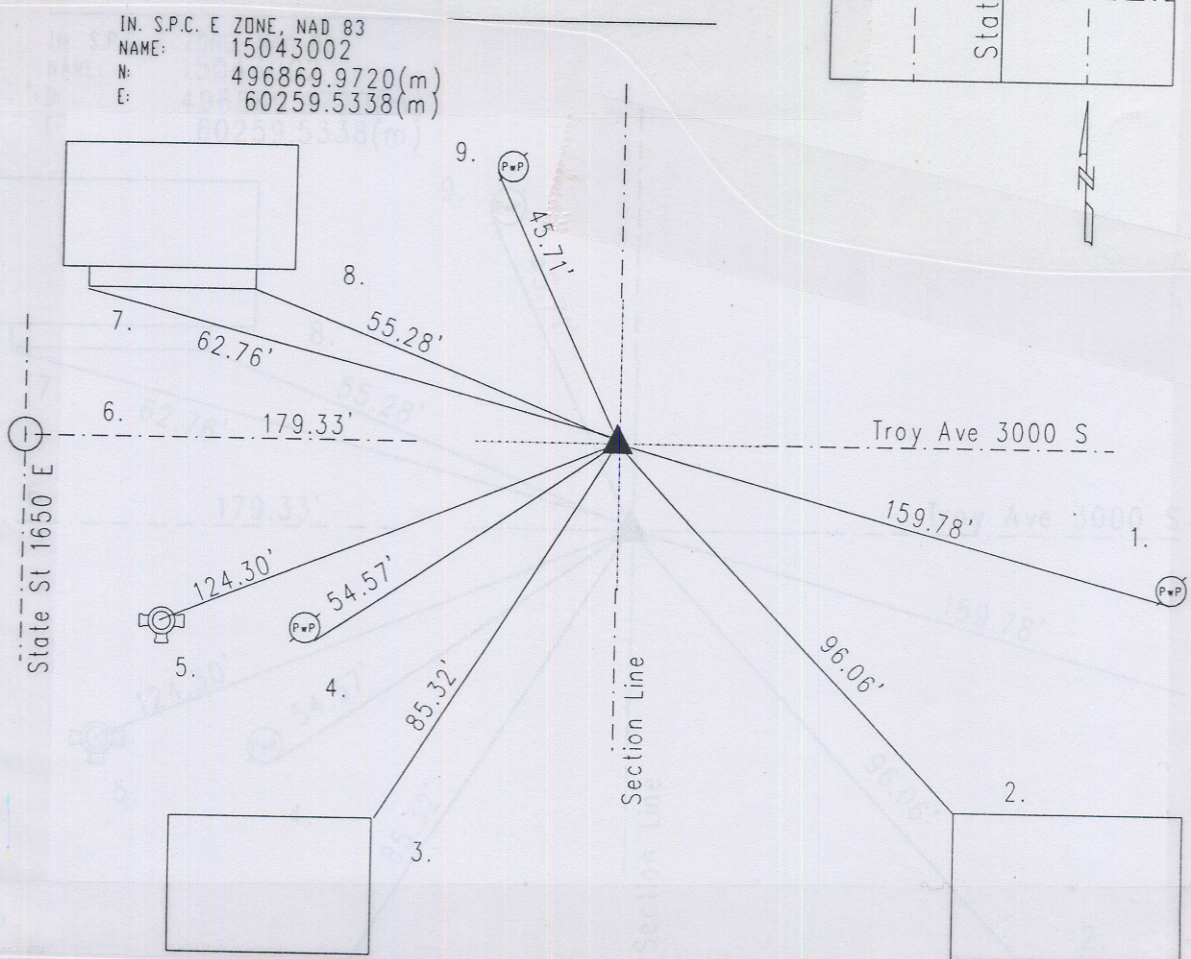


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 30 TOWNSHIP 15 RANGE 4
 DATE: 8-2-04
 PARTY CHIEF: Wilcoxon
 CREW: Harrison
 TYPE OF MARKER: --PK nail over lead pipe--
 METHOD OF ESTABLISHMENT: County: 5-30-01

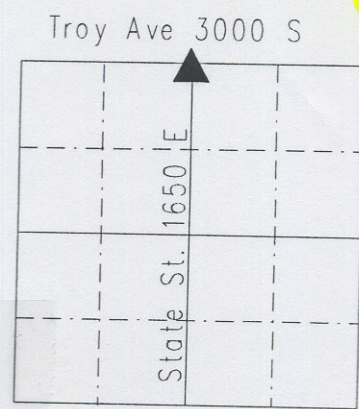

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 20" beech bearing south 60 degrees, thence east 6 links; and a 4" white beech bearing west 32 links. (M.C. Atlas p. 10) Perry Township legal book indicates no stone or witnesses. Corner referenced by MCS on 3/10/45 and called a lead marker with brass plug. Corner referenced by Wilcoxon on 11/3/75 and called a p.k. nail. Corner referenced by Gries on 10/20/88 and called a p.k. nail over lead pipe. Corner referenced by Gries on 8/4/89 and called a p.k. nail. Corner referenced by Kiste on 7/25/96 and called a p.k. nail over lead pipe. Corner referenced by Kiste on 5/30/01 and called a p.k. nail over lead pipe. Corner excavated by Wilcoxon on 7/14/04 and a lead plug in concrete was found 5" down per ties. No other points were found. A#205 cast iron Harrison Monument was set in position as the corner.

REF		
1.	159.78'	PK nail S PwP#18-639 B 10"up
2.	96.06'	NW corner of ADDRESS 1715
3.	85.32'	NE corner of ADDRESS 1709
4.	54.57'	PK nail S PwP#18-638 B 15"up
5.	124.30'	Top nut of fire hydrant
6.	179.33'	Due W to C/L of State Street
7.	62.76'	SW corner top porch for ADDRESS 1704
8.	55.28'	SE "
9.	45.71'	PK nail W PwP#97-638 A 15"up